

SEAL KRETE

DRIVEWAY PROTECTOR

INVISIBLE WATER REPELLENT

PRODUCT DATA

IMPORTANT: Read all directions thoroughly. Always wear gloves and eye protection.

BASIC USE: SEAL-KRETE® Driveway Protector is a water-based concrete sealer designed to provide "invisible" protection to bare concrete surfaces such as driveways, sidewalks, porches and patios. With its unique formula, SEAL-KRETE Driveway Protector actually penetrates and bonds with the concrete to add strength and protect against rain, salt and freeze/thaw damage. It's easy to apply, dries fast and exhibits extreme beading, oil-resistant and long-lasting.

SURFACE PREPARATION: All surfaces must be clean, dry and oil-free. For oil stains, use a degreaser or SEAL-KRETE OSR Oil Stain Remover. Do not apply to painted, stained or coloured concrete surfaces. Make sure all curing compounds and releasing agents have been removed. Repair all cracks and surface breaks. Cover windows, doors, etc., prior to application. Use caution when applying on windy days. Remove any overspray immediately with water. Note: Do not apply to concrete less than 30 days old (fully cured). For new or smooth concrete, acid etching and neutralization are required for proper adhesion. Use a 1:3 solution of hydrochloric acid and water or SEAL-KRETE Clean & Etch, and follow manufacturer's directions. For complete acid-etching and neutralization procedures visit our web site at www.seal-krete.co.nz.

APPLICATION: Do not apply if rain is expected within 24 hours. Temperatures should not fall below 12°C within 24 hours of application. Apply to bare, exterior concrete surfaces only. Do not apply to non-porous or smooth troweled concrete where penetration of the product will not be sufficient. Ready to use – do not dilute. Invert jug 4-5 times to mix. Apply using a garden sprayer or roller. When using a sprayer, lightly spray over the surface. To improve penetration and eliminate puddling, backroll entire surface. A fan-tip spray pattern is recommended. For roller application, use a short nap roller (6mm to 10mm). Apply generously, allowing to penetrate fully into concrete. Backroll if puddling occurs. Only apply 1 coat. SEAL-KRETE Driveway Protector dries quickly and will not accept a re-coat of itself after it has begun to dry. For best results, continue application until job is completely finished.

COVERAGE: 6-8 m²/L. Coverage will vary based on surface porosity.

DRY TIME: Dry to touch in 15 minutes to 1 hour. Dry to foot traffic in 24 hours. Will accept vehicular traffic in 72 hours. (Measured at 25°C, 50% RH).

LIMITATIONS: Do not apply when the temperature of the surface to be coated is less than 12°C or when temperature is expected to drop below 12°C within 24 hours. Do not apply in wet or rainy conditions or if rain is forecast within 24 hours. Do not use below grade or on interior surfaces. Do not apply to any surface other than bare, porous concrete. Do not use on wood. Do not topcoat with any paint or stain. Over-application can result in white residue deposits on the surface. These deposits can be rinsed away with water after 24 hours.

CLEAN-UP & STORAGE: Clean all application tools immediately after use with soap and water. Keep from freezing - do not store at temperatures below 10°C.

TECHNICAL SUPPORT: For more information, technical assistance or to obtain a Material Safety Data Sheet, visit our website or call our help desk on 0800 100 881.

CAUTION: KEEP OUT OF REACH OF CHILDREN.

FIRST AID: For Eye Contact: Flush with water for 15 minutes. For Skin Contact: Prolonged contact may cause irritation. Wash affected area with soap and water. If Swallowed: Do not induce vomiting – seek immediate medical attention. Inhalation: If headache or nausea is experienced, remove the individual to fresh air. If symptoms persist, seek medical attention.



Jac Jay Ltd • PO Box 12-161 • Penrose • Auckland • email: sales@jacjay.co.nz or call 0800 100 881 • visit our website www.seal-krete.co.nz




PENETRATES & BONDS WITH CONCRETE FOR SUPERIOR, LONG-LASTING MOISTURE PROTECTION
MAXIMUM DURABILITY • PROTECTS AGAINST SPALLING, POCKMARKING & ROAD SALTS
REDUCES "HOT TYRE" PICKUP • ONE-COAT APPLICATION • LOW VOCs



Left unprotected, concrete is subject to damage from road salts and moisture penetration

Long-Lasting "Invisible" Concrete Driveway Protection

Maximum Durability, Protects Against Spalling, Pockmarking on Driveways, Sidewalks and Patios

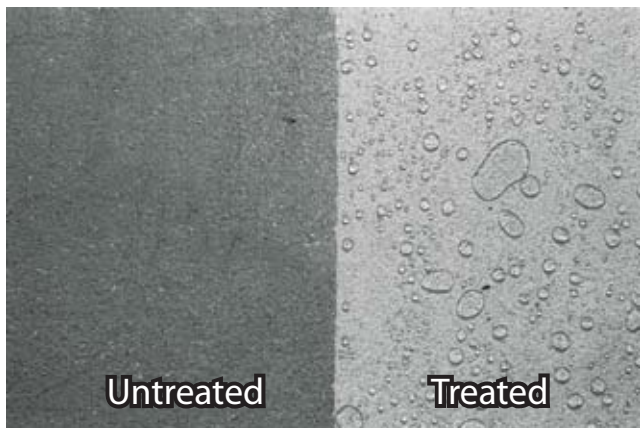

Penetrates and bonds with concrete for superior long lasting moisture protection

LIMITED WARRANTY

Manufacturer/seller makes no warranty of any kind, except that this product is free from defect and is of merchantable quality. Buyer remedy for breach of warranty is limited to replacement of product or refund of purchase price.

LIQUID PROPERTIES

Solids: 5%
 Silicate: Proprietary
 Water Based
 Odor: Very Low
 Appearance: Clear
 VOC: Less than 100 grams per litre.

COVERAGE GUIDELINES

Material	Coverage Approx. m ² /L.
Bare Concrete	5 - 8
Actual coverage will vary depending on porosity of surface.	